


D.C. RELEASE	DESCRIPTION	DATE	BY	SCALE	USED OR	<b>FLEETWOOD</b> PAGE NO. 7 2 1 - 2 8 - 0 0 0 1 9 RECREATIONAL VEHICLE GROUP SHEET 2 OF 3 TITLE: FINAL FINISH HEAT DUCT ROUTING
				1/2" = 1'-0"		
99-00		04-02-98	BT	DRAWN: Brian T. DATE: 03-24-98		
99-02		06-11-98	BT	PROJECT: 99721302 PLOT: 06/11/98 14:13:13 01tuckeb		

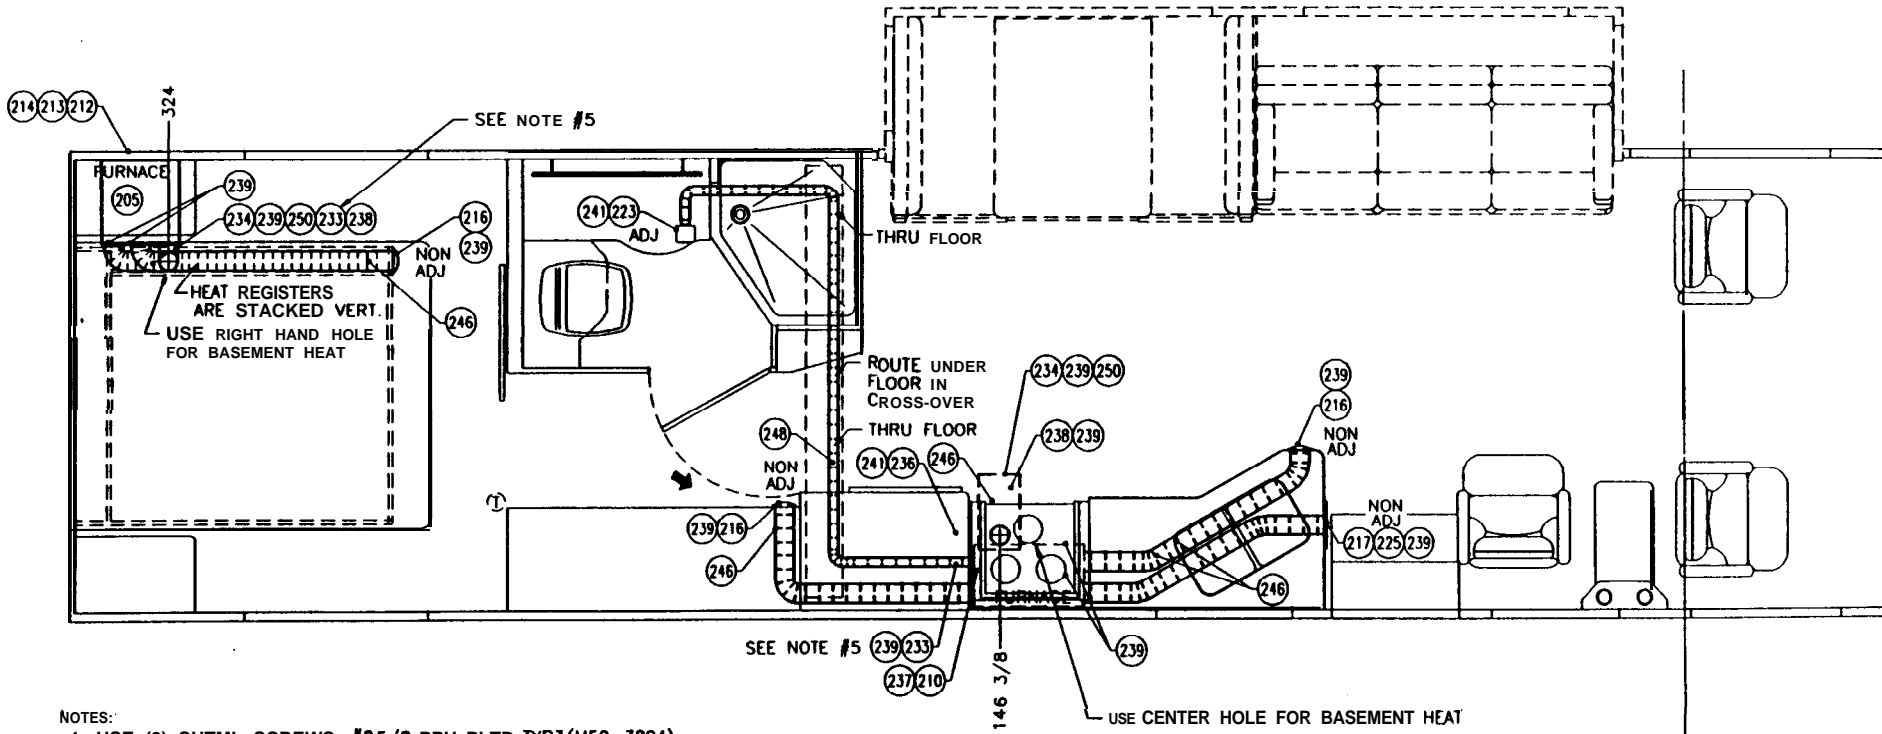

- NOTES:
1. USE (2) SHTML SCREWS- #85/8 PPH PLTD TYP3(M59-3804) TO ATTACH DUCT TO REGISTERS & REGISTERS TO CABINETS.
  2. FOR AIRTIGHT SEAL USE DUCT TAPE AT ALL HEAT DUCT CONNECTIONS (1" MINIMUM OVERLAP).
  3. CLAMP ALL UNDER FLOOR DUCTS @ 24" O.C. USING TIE- WIRE PLASTIC x 9 W/MNT BLACK (F62-1009).
  4. THERMOSTAT TO BE MOUNTED 54" ABOVE FLOOR.
  5. DUCT CONNECTOR(C12-0105) SUPPLIED W/FURNACE. (2) PER ON 20V BTU . . . (1) PER ON 35V BTU

2.126