


149-7 COMPONENT TESTING: MINI ISO RELAY

2001 F53

COMPONENT TESTING PROCEDURE

Connect Battery Positive and Negative to Terminals:	Check Continuity from Terminals:	Continuity will be:
85 and 86	30 to 87 and 30 to 87A	From 30 to 87 only
-	85 to all others	To 86 only
-	30 to all others	To 87A only

TERMINALS

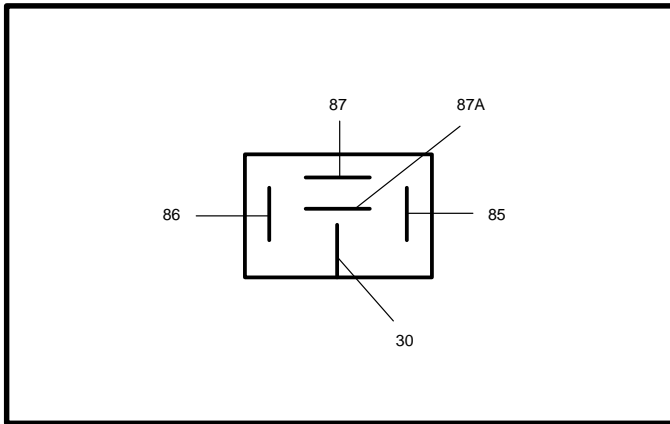

SCHEMATIC

