


# IGNITION SYSTEM 21-2

2001 F53

Used to identify change in crankshaft rotational speed to indicate cylinder misfire.

Sends signal to PCM to adjust timing to control engine knock.

Used by PCM to identify camshaft position during engine startup to begin sequential pulsing of the injectors.

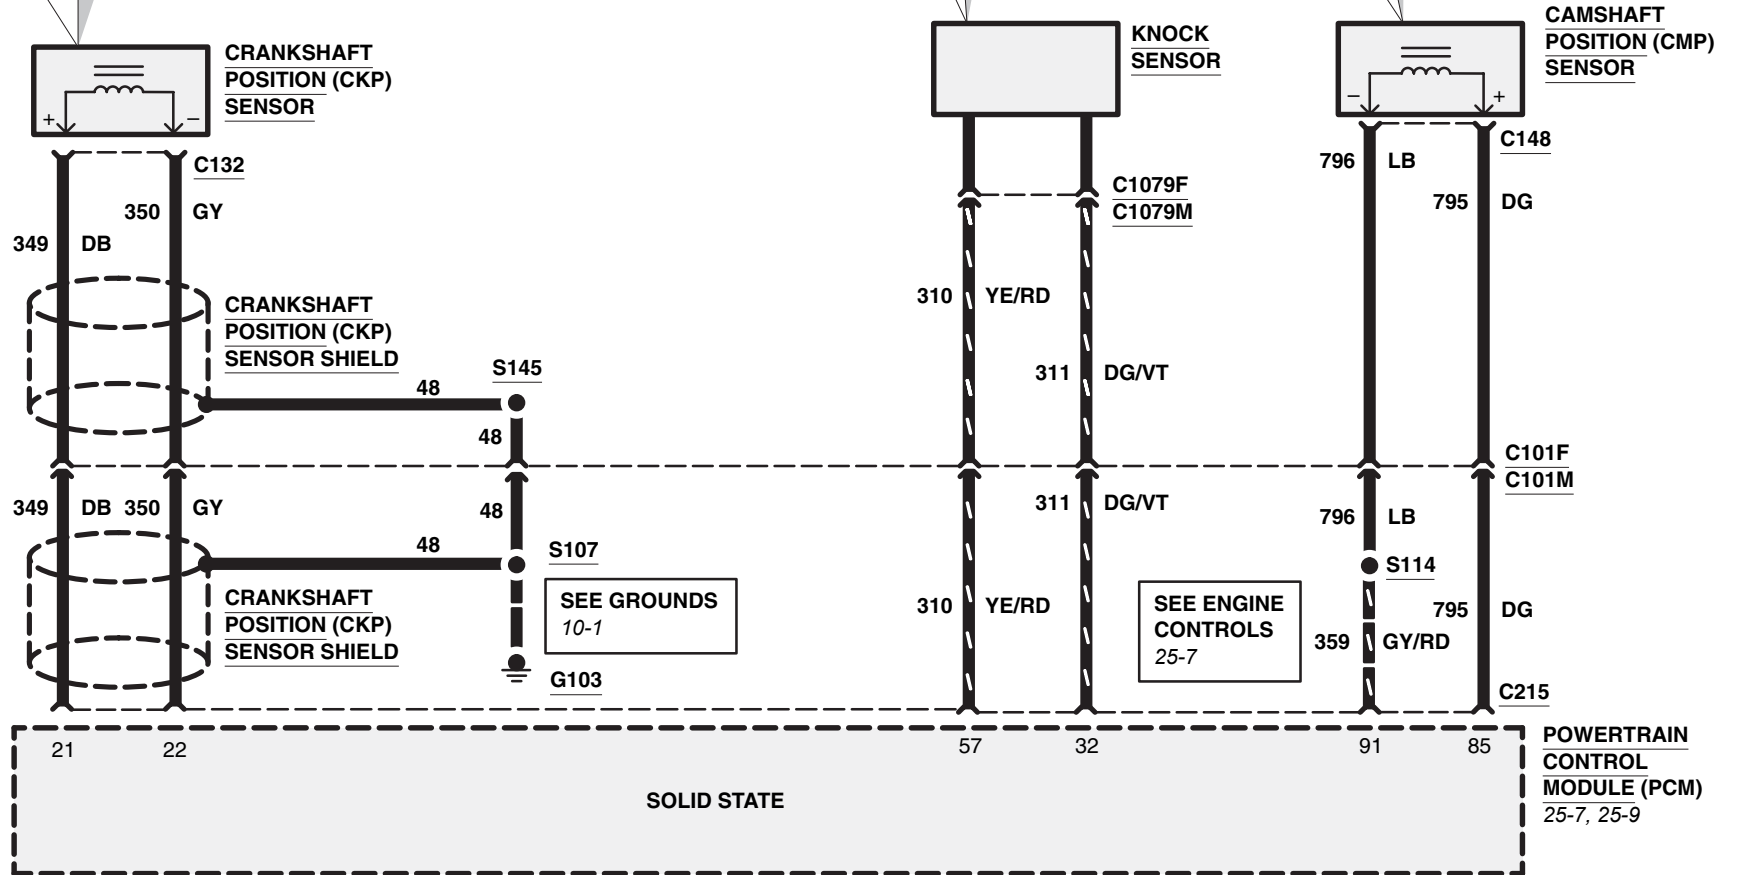

Refer to Location Index, Cell 152, for Component, Connector, Splice, Ground and Base Part Number descriptions and locations.

### CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C215	25-12