


COMPONENT TESTING: MICRO ISO RELAY 149-8

2001 F53

COMPONENT TESTING PROCEDURE

Connect Battery Positive and Negative to Terminals:	Check Continuity from Terminals:	Continuity will be:
1 and 2	3 to 4 and 3 to 5	From 3 to 5 only
-	1 to all others	To 2 only
-	3 to all others	To 4 only

TERMINALS

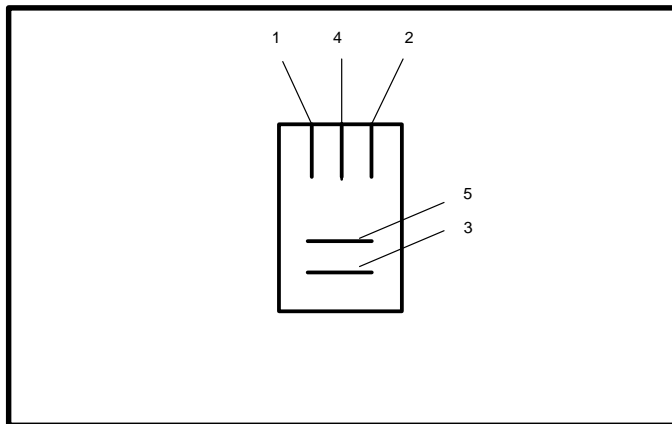

SCHEMATIC

